


ISO 6164 - '94 Closed adaptors
 Collets d'obturation ISO 6164 - '94
 ISO 6164 - '94 Verschluss Stopfen

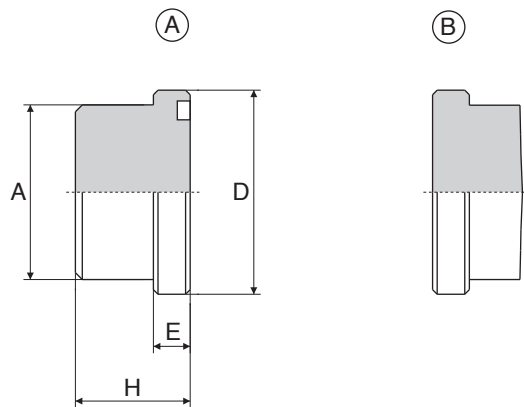

Serie 250 bar

Pressione max esercizio bar	Tipo Type	DN	Size	D	E	A	H	OR O-RING
250	64.L.10.O	10	3/8"	24,5	6,8	18	18	3068
250	64.L.13.O	13	1/2"	30,2	6,8	24	20	4075
250	64.L.19.O	19	3/4"	38,1	6,8	31,5	22	4100
250	64.L.25.O	25	1"	44,5	8	38	25	4131
250	64.L.32.O	32	1" 1/4	50,8	8	43	30	4150
250	64.L.38.O	38	1" 1/2	60,4	8	50	36	4187
250	64.L.51.O	51	2"	71,4	9,6	62	40	4225
250	64.L.56.O	56	2" 1/2	87,2	12	76	45	4275
250	64.L.63.O	63	3"	101,6	15	90	52	4337
250	64.L.80.O*	80	4"	131	23,5	114	61,5	6387

*: non prevista da ISO 6164 - '94 / Not in ISO 6164 - '94

Serie 400 bar

Pressione max esercizio bar	Tipo Type	DN	Size	D	E	A	H	OR O-RING
400	64.S.10.O	10	3/8"	26	7,8	18	18	3068
400	64.S.13.O	13	1/2"	31,8	7,8	24	20	4075
400	64.S.19.O	19	3/4"	41,3	8,8	32	22	4100
400	64.S.25.O	25	1"	47,6	9,5	38	25	4131
400	64.S.32.O	32	1" 1/4	54	10,3	44	30	4150
400	64.S.38.O	38	1" 1/2	63,5	12,6	51	36	4187
400	64.S.51.O	51	2"	79,4	12,6	67	40	6225
400	64.S.56.O	56	2" 1/2	94,2	16,5	80	50	6275
400	64.S.63.O	63	3"	104	18	90	52	6300
400	64.S.70.O	70	3" 1/2	119	20	102	60	6337
350	64.S.80.O	80	4"	131	23,5	114	70	6350

Per ordinare coduli
 How order straight adaptors
 Example pour commander collets
 Bestellbeispiel für gerade adaptoren

Es.: 64.....OA
 Es.: 64.....OB